

Farm Machinery Testing and Training Centre

Department of Farm Power and Machinery College of Agricultural Engineering and Technology Dr. PANJABRAO DESHMUKH KRISHI VIDYAPEETH AKOLA- 444 104 (MS)



SPECIFICATION SHEET OF TRACTOR OPERATED MAIZE SHELLER

1.1	General				
	Name of Manufacturer/ applicant and	:			
	Address				
	Туре	:			
	Make	:			
	Model	:			
	Year of manufacturer	:			
1.2	Main Frame				
	Туре	:			
	Size, mm	:			
	Constructional details:				
1.3	Platform				
	Туре	:			
	Number of platform, Nos.	:			
	Material	:			
	Size, mm	:			
	-				
1.4	Power unit				
	Provision	:			
	Type of prime mower	:			
	Recommended power, hp	:			
	Type of drive	:			

1.5	Main Drive					
	Method of tra	nsmission	:			
1.5.1	Propeller sha	aft				
	Type		:			
	Length of sha	aft, mm	<u> </u>			
		Maximum	:			
		Minimum	:			
	Mass of shaft	, kg	:			
	Provision of locking		:			
	Hub Dimension, mm Refer Fig1 As per IS 4931:1995					
	Notations	As per IS:4931:1995,		As observed, mm	Conformity to IS	
		mm				
	Dφ	34.93 ± 0.03				
	dφ	29.7 ± 0.7				
	W	8.69 (Min)				
	В					
			===			

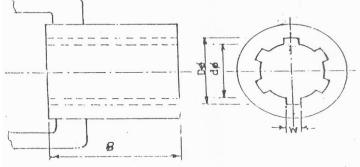


Fig 1 Hub dimensions, mm

1.5.2 Splined end of pinion shaft Fig 2 Dimensions of splined end of pinion shaft, mm **Specification** As per IS: 4931-**Conformity to IS** As observed 2004 34.79±0.06 Dφ 28.91±0.05 dφ 29.4±0.1 Вφ S 8.69 6.7±0.25 R 30° α G Η 38 54 (Min.) A 76 (Min.) В 25±0.5 Ι J (optional hole) 8.3 Main drive 1.6 Type Nos. & Size of belt : Size of pulley (Driving), mm : Size of pulley (Driven), mm : Diameter of main shaft, mm :

1.7	Shelling Unit		
	Туре	:	
	Constructional features		
	Diameter, mm	:	
	Width, mm	:	
	Recommended speed, rpm	:	
	Number and size of beaters/projections/	:	
	bars, mm		
1.8	Concave		
	Туре	:	
	Diameter, mm	:	
	Length, mm		
	Concave clearance range, mm	:	
	Recommended concave clearance, cm	:	
	Clearance adjustment provision	:	
1.9	Sieve		
	Туре	:	
	Number	:	
	Total length and width, mm	:	
	Effective length and width, mm	:	
	Number of holes per cm ²		
	Size of hole, mm	:	
	Sieve clearance, mm	:	
	Screen pitch range	:	
	Recommended screen pitch	:	

1.10	Shaker					
	Туре	:				
	Number of strokes per minute	:				
1.11	Blower					
	Number	:				
	Туре	:				
	Number of blades	:				
	Size of blades, mm	:				
	Diameter, mm	:				
	Recommended speed, rpm	:				
	Recommended air displacement	:				
	Provision for changing air	:				
	displacement					
1.12	Ring-type hitching system for trailing					
	Contractions details:					
	Fig 3 Hitch pin					
1.13	Elevator					
	Elevator					
	Type		:			
			:			
	Туре					
	Type Capacity, kg/h		:			
1.14	Type Capacity, kg/h Grain spout size, mm		:			
1.14	Type Capacity, kg/h Grain spout size, mm Height above ground level, mm		:			
1.14	Type Capacity, kg/h Grain spout size, mm Height above ground level, mm Hopper		: :			
1.14	Type Capacity, kg/h Grain spout size, mm Height above ground level, mm Hopper Type		:			

1.15	Transport	
	Туре	:
	Number of wheels, Nos.	:
	Size of wheels, inch	:
1.16	Parking Stand:	
	Numbers of stand, Nos.	:
	Size, mm	:
	Nos. of holes and distance between two	:
	holes, mm	
1.17	Flywheel	
	Number	:
	Size, mm	:
	Mass, kg	:
1.18	Overall dimensions	
	Length, mm	:
	Width, mm	:
	Height, mm	:
	Total mass, kg	:
1.19	Tools, Accessories and Manuals provided	:
1.20	Figures:	
Dlag		
Plac		
Date	2:	
		Signature:
		Name :
		Designation: