



Dr. PANJABRAO DESHMUKH KRISHI VIDYAPEETH, AKOLA
Regional Research Center, Amravati - 444 602 (MS)

Dr. S. S. Nichal
Head

Phone: (0721)2970179
e-mail:rrc_amt@rediffmail.com

No/ RRC / 1433/2025

Date:- 17/01/2025

Quotation Notice

Subject:- Quotation for "Erection of Crossing Block (Shaded Structure for Hybridization)"

Please arrange to send quotation for "**Erection of Crossing Block (Shaded Structure for Hybridization)**" at Regional Research Center (Dr. P.D.K.V.), Amravati with particulars and conditions as mentioned below. The details of features are given in table enclosed here with the form of quotation.

1. The Quotation should be given in the form enclosed.
2. Rates should be quoted as per work specified.
3. Specification of work should not be deviated from as mentioned in quotation notice.
4. The quotation should be in the name of Head, Regional Research Center (Dr. PDKV), Morshi Road, Amravati-444 602, mentioned "**Erection of Crossing Block (Shaded Structure for Hybridization)**" on envelop.
5. The quotation should reach to this office on or before **29.01.2025**
6. The quotation will be accepted on all working days between 10:30 am to 5:30 pm and will be opened on next day.
7. GST number should be mentioned on quotation.
8. Clearly mention whether rates are inclusive or exclusive of GST.
9. No labours will be provided by this office.
10. This office will not be responsible if any accident happen during the erection of crossing block (shaded structure for hybridization).
11. While working, if there is damage to university property, the responsibility should be held on contractor.
12. The rates quoted should remain valid for a period of 1 year from the date of opening the quotation.
13. The right to accept whole or part of the quotation or reject is reserved with undersigned without assigning reason thereof.
14. The firm must have ISO 9001; 2015 - Quality Management System, ISO 14001; 2015 Environment Management System, ISO 45001:2018- Occupational Health & Safety Management System.
15. The installation drawing should be submitted along with quotation.
16. The bills with printed Bill No. and GST numbers will be accepted only.
17. Final payment of work will be made only after complete work along with satisfactorily installation work and after the completion of entire official formalities.
18. For any further details of quotation, contact to the office of Head, RRC, Amravati during the office time only

Head

Regional Research Center
Amravati

FORM OF QUOTATION

Quotation for “Erection of Crossing Block (Shaded Structure for Hybridization)” as per the enquiry of the Regional Research Center (Dr. PDKV), Amravati is as under.


| S. N | Specification | Rate |
|------|---|------|
| 1. | Structure: (40 feet length, 25 feet width, 9 feet height in sides and 12 feet height at middle of the structure). 8 nos of ISI mark GI pipe (4 pipes in each side, square type, Nominal bore - 5 inch; gauge 10 and height 13 feet) fixed in the concrete cement pillar foundation (approx 9"x 9" erected at 4 feet depth and 1 feet above ground) | |
| 2. | Roof: (as per photo attached) A) Frame for roof (40 feet × 25 feet) made with 1 meter squares iron rods and the roof along with frames should be curve shaped to facilitate smooth water runoff. Dimensions of frame pipes: Nominal bore: 2 inch; gauge 16 B) Multiwall polycarbonate UV resistance sheets (6mm) to cover the area of 40 feet × 25 feet (1000 sq feet) and extended approx. 4 feet around all four sides (periphery) of the block. | |
| 3. | Rust proof GI net: GI net fixed horizontally and vertically on the frame and provided with provision of door for entry in the block (mesh size – Approx 20 gauge and ½" square). | |
| 4. | Flooring: 9 inch layering of floor with gravels, murrhum and sand; fixed with interlocking concrete paver blocks of high strength (approx. 3 inch thickness). Flooring must cover 3 feet outer and 1.5 feet inner periphery of the crossing block and 2 feet pathway in the center of the structure. The finished floor level/height should be finally raised to 6 inch above the ground level. | |
| 5 | Roof frames should be painted with rust resistant green colour after priming. | |
| 6. | Provision for water supply with tap connection. | |

The conditions in the Quotation notice are accepted by me

Place:-

Date:-

Signature of the supplier
& seal of the farm

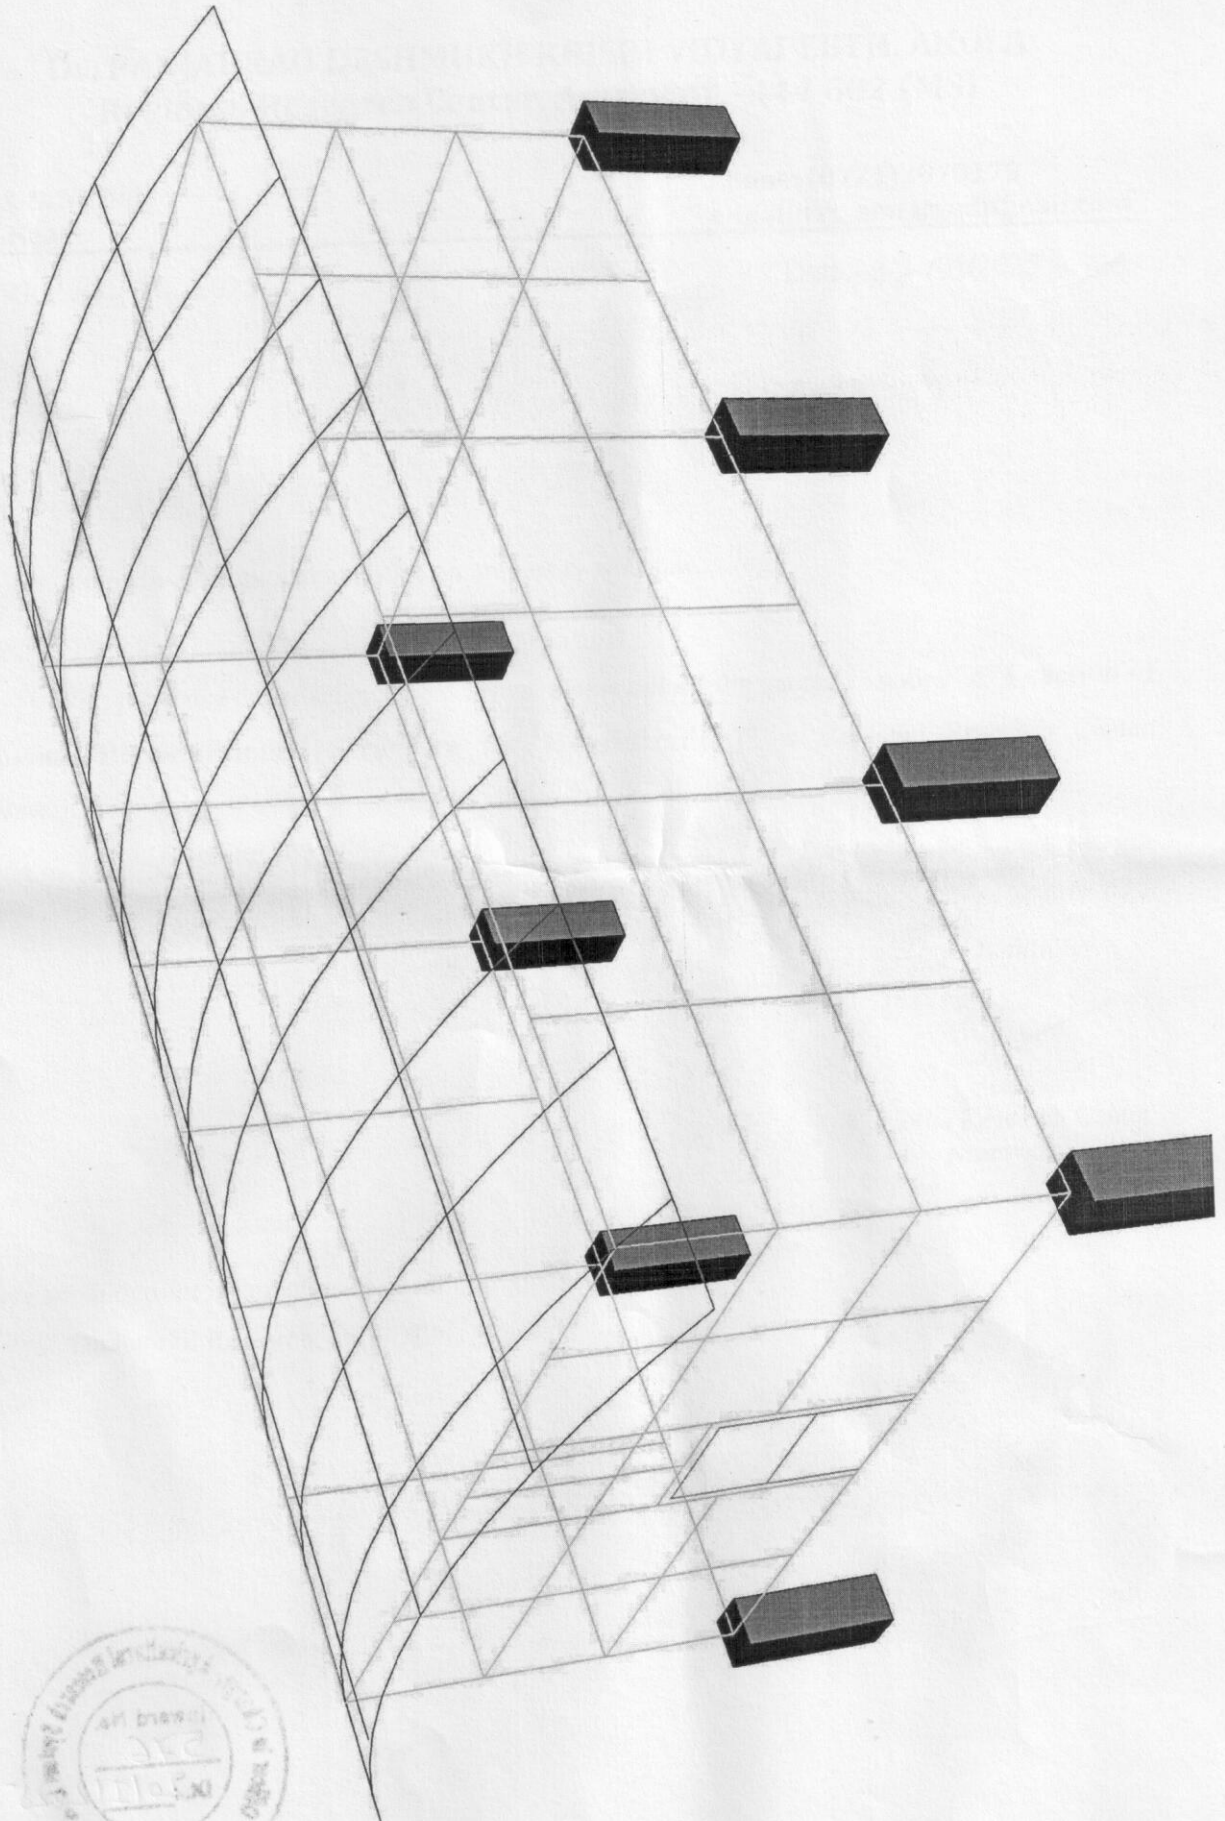

Proposed Crossing Block Structure